

SANYEAR

多层片式陶瓷电容器规格书

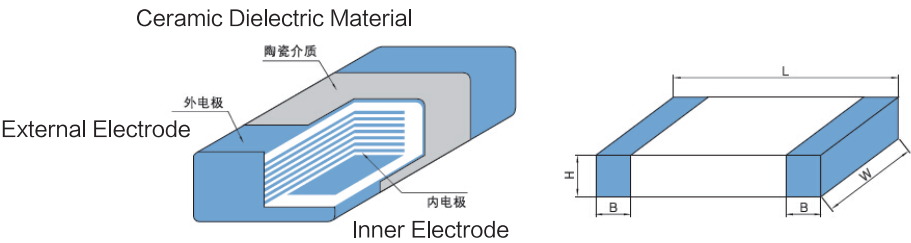
MULTILAYER CHIP CERAMIC CAPACITOR CATALOG

多层片式陶瓷电容器 Multilayer Chip Ceramic Capacitor

产品特点 Product Features

- 产品尺寸精度高，便于自动贴片机高效装配
- 端电极三层电极，适合波峰焊与回流焊；介电体与外表为同种材料，环境条件影响小
- 含有C0G到Y5V各种温度特性介质，适用于计算机、通讯、家用电器和仪器仪表灯普通电子设备
- The precision of product size is high,suitable for auto SMT machines high efficiency assembly.
- External Electrode has 3 layers,suitable for both wave and reflow soldering.
- Consist of all kinds of temperature dielectric material form C0G to Y5V,suitable for computers, communications,home appliances,instruments and other normal electronic equipments.

产品结构 Product Construction



产品尺寸 Product Dimensions

尺寸 Size	MLCC尺寸规格（单位：mm）			
	L	W	H（max）	B（max）
01005	0.40±0.09	0.20±0.09	0.29	0.13
0201	0.60±0.09	0.30±0.09	0.39	0.20
0402	1.00±0.30	0.50±0.30	0.80	0.35
0603	1.60±0.20	0.80±0.20	1.00	0.60
0805	2.00±0.20	1.25±0.20	1.45	0.75
1206	3.20±0.30	1.60±0.30	1.90	0.80
1210	3.20±0.40	2.50±0.30	2.80	0.80
1808	4.50±0.40	2.00±0.30	2.80	1.50
1812	4.50±0.40	3.20±0.40	3.50	1.50
2220	5.70±0.50	5.00±0.40	3.50	1.30
2225	5.70±0.50	6.40±0.50	3.00	1.10

常规多层片式陶瓷电容器 General Multilayers Chip Ceramic Capacitor

■ **产品特点 Product Features**

- COG (NPO)：最常用的温度补偿型电容器，属于Ⅰ类介质材料，其性能稳定，温度系数在 $0 \pm 30\text{PPM}/^\circ\text{C}$ 以内，具有好的高频特性。
 - X7R：工业中广泛使用的一种温度稳定型电容器，属于Ⅱ类介质材料，具有较高的介电常数，在使用温度（ $-55^\circ\text{C} \sim +125^\circ\text{C}$ ）范围内容值变化率在 $\pm 15\%$ 以内。
 - X6S：工业中广泛使用的一种温度稳定型电容器，属于Ⅱ类介质材料，具有较高的介电常数，在使用温度（ $-55^\circ\text{C} \sim +105^\circ\text{C}$ ）范围内容值变化率在 $\pm 22\%$ 以内。
 - X5R：工业中广泛使用的一种温度稳定型电容器，属于Ⅱ类介质材料，具有较高的介电常数，在使用温度（ $-55^\circ\text{C} \sim +85^\circ\text{C}$ ）范围内容值变化率在 $\pm 15\%$ 以内。
 - Y5V：普通用途的电容器，在使用温度（ $-30^\circ\text{C} \sim +85^\circ\text{C}$ ）范围内容值变化率较大， $+22\%/-82\%$ 以内，具有高介电常数，可以用小的尺寸做大容量的电容。
- C0G(NP0): The most normal temperature compensated capacitor,belongs to Class I dielectric material with stable performance,TC $0 \pm 30\text{ppm}/^\circ\text{C}$,high frequency.
 - X7R: Widely used in industries temperature stable capacitor,belongs to Class II dielectric material with high dielectric constant,and the capacitance changed rate is $\pm 15\%$ for working temperature($-55^\circ\text{C} \sim +125^\circ\text{C}$).
 - X6S: Widely used in industries temperature stable capacitor,belongs to Class II dielectric material with high dielectric constant,and the capacitance changed rate is $\pm 22\%$ for working temperature($-55^\circ\text{C} \sim +105^\circ\text{C}$).
 - X5R: Widely used in industries temperature stable capacitor,belongs to Class II dielectric material with high dielectric constant,and the capacitance changed rate is $\pm 15\%$ for working temperature($-55^\circ\text{C} \sim +85^\circ\text{C}$).
 - Y5V: Y5V dielectric is generally used dielectric material,belongs to Class II dielectric material,it shows a variation of capacitance within $+22\%/-85\%$ when the temperature is between $-30^\circ\text{C} \sim +85^\circ\text{C}$. This kind of dielectric is with very high dielectric constant and suitable for high value capacitors.

■ **产品规格型号 Part Number**

C	0603	X7R	102	K	500	N	T
产品类型 Product Type	尺寸 Size	温度系数 温度特性 T.C.	电容值 Capacitance	允许偏差 Tolerance	额定电压 Rate Voltage	端头类型 Terminal Type	包装 Packaging
多层式 陶瓷电 容器 MLCC	01005 0201 0402 0603 0805 1206 1210 1808 1812 2220 2225	COG (NPO) X7R X6S X5R Y5V	1R5=1.5pF 100=10pF 222=2.2NF 105=1uF 475=4.7uF	A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10% M=±20% Z=+80% -20%	4R0=4V 6R3=6.3V 250=25V 500=50V 101=100V 251=250V 102=1KV	N:银 (或铜) /镍/锡 N=Ag (or Cu) /Ni/Sn	T=编带 Taping B=袋散装 Bulk

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	C0G											
尺寸	01005	0201		0402	0603	0805	1206	1210	1808	1812	2220	2225
V_{DC}	6.3	16	50	10	10	10	16	16	16	16	16	16
C_p	10	25		16	16	16	25	25	25	25	25	25
	16			25	25	25	50	50	50	50	50	50
	25			50	50	50						
0R47												
0R5												
0R56												
0R68												
0R82												
1R0												
1R2												
1R3												
1R5												
1R8												
2R2												
2R7												
3R3												
3R9												
4R7												
5R6												
6R8												
8R2												
9R0												
100												
120												
150												
180												
220												
270												
330												
390												
470												
560												
680												
750												
820												
101												
121												
151												
181												
221												
271												
331												
391												
471												
511												
561												
681												
821												
102												
122												
152												
182												
222												
272												
332												
392												
472												
562												
682												
822												
103												
123												
153												
183												
223												
273												
333												
473												
563												
104												

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	X7R																																
尺寸	01005			0201			0402				0603				0805			1206		1210			1812		2220			2225					
V_{DC}	6.3			6.3	10	16	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	
C_p	10	16	25	10	16	25	10	16	25	10	16	25	10	16	25	10	16	10	16	10	16	10	16	10	16	10	16	10	16	10	16	25	50
101																																	
121																																	
151																																	
181																																	
221																																	
241																																	
271																																	
331																																	
391																																	
471																																	
511																																	
561																																	
681																																	
821																																	
102																																	
122																																	
152																																	
182																																	
222																																	
272																																	
332																																	
392																																	
472																																	
562																																	
682																																	
822																																	
103																																	
123																																	
153																																	
183																																	
223																																	
273																																	
333																																	
393																																	
473																																	
563																																	
823																																	
104																																	
124																																	
154																																	
184																																	
224																																	
274																																	
334																																	
394																																	
474																																	
564																																	
684																																	
824																																	
105																																	
155																																	
225																																	
275																																	
335																																	
395																																	
475																																	
565																																	
106																																	
226																																	
476																																	

背景色代表：可生产型号

[illegible]

■ 产品容值范围 Product Capacitance Range

背景色代表：可生产型号

材质	X5R																																		
尺寸	01005			0201					0402				0603			0805			1206			1210			1812			2220							
V_{DC}	4	6.3	10	4	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	
C_p	4	6.3	10	4	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	
101																																			
121																																			
151																																			
181																																			
221																																			
271																																			
331																																			
391																																			
471																																			
511																																			
561																																			
681																																			
821																																			
102																																			
122																																			
152																																			
182																																			
222																																			
272																																			
332																																			
392																																			
472																																			
562																																			
682																																			
822																																			
103																																			
123																																			
153																																			
183																																			
223																																			
273																																			
333																																			
393																																			
473																																			
563																																			
823																																			
104																																			
124																																			
154																																			
184																																			
224																																			
274																																			
334																																			
394																																			
474																																			
564																																			
684																																			
824																																			
105																																			
225																																			
475																																			
106																																			
226																																			
476																																			
107																																			
227																																			

■ 产品容值范围 Product Capacitance Range


背景色代表：可生产型号

材质	Y5V																																		
尺寸	0402				0603			0805				1206				1210				1808			1812			2220			2225						
V_{DC} C_p	6.3 10	16	25	50	6.3 10	16 25	50	6.3 10	16	25	50	6.3	10 16	25	50	6.3	10	16	25 50	16	25	50	6.3 10	16	25 50	6.3 10 16	25	50	6.3 10 16 25	50					
103																																			
123																																			
153																																			
183																																			
223																																			
273																																			
333																																			
393																																			
473																																			
563																																			
823																																			
104																																			
124																																			
154																																			
184																																			
224																																			
274																																			
334																																			
394																																			
474																																			
564																																			
684																																			
824																																			
105																																			
155																																			
225																																			
275																																			
335																																			
395																																			
475																																			
565																																			
106																																			
226																																			
476																																			
107																																			


■ 技术指标和实验方法 Specifications and Test Method

NO	项目 Item	技术指标 Specification		实验方法 Test Method
1	外观 Appreance	无异常 No abnormalities		通过显微镜视觉检测 (X10) On microscope
2	尺寸 Dimension	在要求的范围内 Within the specified dimensions		采用精度不低于0.01mm千分尺 Using calipers on micrometer with tolerance no less than 0.01mm
3	容量(c) Capacitance	在要求的范围内 Within the specified dimensions		Class I : $C_p \leq 1000\text{pF}$ $1\text{MHz} \pm 10\%$, $1.0 \pm 0.1\text{Vrms}$ $C_p > 1000\text{pF}$ $1\text{KHz} \pm 10\%$, $1.0 \pm 0.1\text{Vrms}$ Class II: $C_p < 10\mu\text{F}$ $1\text{KHz} \pm 10\%$, $1.0 \pm 0.1\text{Vrms}$ $C_p \geq 10\mu\text{F}$ $120 \pm 24\text{Hz}$, $1.0 \pm 0.1\text{Vrms}$
4	损耗(Q/DF) Dissipation Factor	C0G	$C_p < 30\text{pF}$, $Q \geq 400+20C_p$ $C_p \geq 30\text{pF}$, $Q \geq 1000$	
		X7R X6S X5R	■ $U_R \geq 100\text{V}$ $DF \leq 7.5\%$ ■ $25\text{V} \leq U_R \leq 50\text{V}$, $DF \leq 3.5\%$ $DF \leq 10\%$ 0201 ≥ 104, 0402 ≥ 333 0603 ≥ 104, 0805 ≥ 684 1206 ≥ 225, 1210 ≥ 475 $DF \leq 12.5\%$ 0402 ≥ 474 ■ $U_R \leq 16\text{V}$, $DF \leq 5.0\%$ $DF \leq 10\%$, 0201 ≥ 104, 0402 ≥ 563 0603 ≥ 564, 0805 ≥ 105 1206 ≥ 475, 1210 ≥ 106 ■ $U_R \leq 10\text{V}$, $DF \leq 7.0\%$ $DF \leq 10\%$ 01005, 0201 ≥ 123 0402 ≥ 224, 0603 ≥ 334 0805 ≥ 225, 1206 ≥ 225 1210 ≥ 226 $DF \leq 15\%$, 0201 ≥ 104, 0402 ≥ 105 ■ $U_R = 6.3\text{V}$, $DF \leq 10\%$ $DF \leq 15\%$, 0201 ≥ 104, 0402 ≥ 105 0603 ≥ 106, 0805 ≥ 475 1206 ≥ 476, 1210 ≥ 107 $DF \leq 20\%$, 0402 ≥ 225 ■ $U_R = 4\text{V}$, $DF \leq 15\%$	
		Y5V	■ $U_R \geq 50\text{V}$, $DF \leq 12.5\%$ ■ $U_R = 25\text{V}$, $DF \leq 7.0\%$ $DF \leq 9\%$, 0402 ≥ 683, 0603 ≥ 474 0805 ≥ 105, 1206 ≥ 475 1210 ≥ 106 ■ $U_R = 16\text{V}$, $DF \leq 15\%$ ■ $U_R = 10\text{V}$, $DF \leq 20\%$ ■ $U_R \leq 6.3\text{V}$, $DF \leq 20\%$	
		高Q	$C_p > 30\text{pF}$ $Q \geq 1000$ $1\text{pF} < C_p \leq 30\text{pF}$ $Q \geq 400+20C_p$ $C_p \leq 1\text{pF}$ $Q \geq 300$	
5	绝缘电阻(IR) Insulation Resistance	C0G	$R_i \geq 10\text{G}\Omega$ 或 $500\Omega \cdot \text{F}$, 取最小值 $R_i \geq 10\text{G}\Omega$ 或 $500\Omega \cdot \text{F}$, whichever is smaller	施加电压: $U_R \leq 400\text{V}$ $U_{\text{测}} = U_R$ $U_R > 400\text{V}$ $U_{\text{测}} = 400\text{V}$ 充电时间: 60 ± 5秒 To apply voltage: $U_R \leq 400\text{V}$ $U_{\text{测}} = U_R$ $U_R > 400\text{V}$ $U_{\text{测}} = 400\text{V}$ Charge time: 60 ± 5sec

■ 技术指标和实验方法 Specifications and Test Method

NO	项目 Item	技术指标 Specification		实验方法 Test Method																								
5	绝缘电阻(IR) Insulation Resistance	X7R X6S X5R Y5V 中高压	$R_i \geq 4G\Omega$ 或 $100\Omega \cdot F$ (以下范围为 $50\Omega \cdot F$) 取较小值 $R_i \geq 4G\Omega$ or $100\Omega \cdot F$ (50 $\Omega \cdot F$ of below range), whichever is smaller 以下范围below range: ■ 50V: 0402 ≥ 104 ; 0603 ≥ 225 ; 0805 ≥ 106 ; 1206 ≥ 106 ■ 25V: 0201 ≥ 104 ; 0402 ≥ 224 ; 0603 ≥ 106 ; 0805 ≥ 106 ; 1206 ≥ 226 ; 01005 (X6S/X5R) ■ 16V: 0603 ≥ 106 ; 01005 (X6S/X5R) ■ 10V: 0201 > 104 ; 0603 ≥ 106 ; 0805 ≥ 476 ; 01005 (X6S/X5R) ■ 6.3V: 0201 ≥ 104 ; 0603 ≥ 475 ; 1206 ≥ 106 ; 0100 (X6SX5R) ■ 4V: 0603 ≥ 226 ; 0805 ≥ 476 ; 1206 ≥ 107 ; 01005 (X6SX5R)	施加电压: $U_R \leq 400V$ $U_{测} = U_R$ $U_R > 400V$ $U_{测} = 400V$ 充电时间: 60 $\pm$ 5秒 To apply voltage: $U_R \leq 400V$ $U_{测} = U_R$ $U_R > 400V$ $U_{测} = 400V$ Charge time: 60 $\pm$ 5sec																								
6	耐电压 Dielectric Strength	C0G X7R X6S X5R Y5V	无介质击穿和材料裂缝 No dielectric breakdown or mechanical breakdown	施加电压: $U_R < 100V$: 250% $100V \leq U_R < 1000V$: 150% $U_R \geq 1000V$: 120% 测试时间: 60 $\pm$ 5秒, 最大电流: 不超过 50mA To apply voltage: $U_R < 100V$: 250%; $100V \leq U_R < 1000V$: 150%; $U_R \geq 1000V$: 120% Test time: 60 $\pm$ 5sec, Max current: should not exceed 50mA																								
*7	电容量温度系数或温度特性 Capatiance Temperature Coefficient Or Temperature Characteristics	C0G X7R X6S X5R Y5V	温度系数 $\leq 0 \pm 30ppm/^{\circ}C$ Temperature coefficient within $0 \pm 30ppm/^{\circ}C$ 容量变化 $\leq \pm 15\%$ Capacitance change within $\pm 15\%$ 容量变化 $\leq +22\% \sim -82\%$ Capacitance change within $+22\% \sim -82\%$	按系列温度顺序测试电容量 Measure capacitance under follow table list <table><tr><th>步骤Step</th><th>1</th><th>2</th><th>3</th><th>4</th><th>5</th></tr><tr><td>C0G/X7R</td><td>25 $\pm$ 2$^{\circ}C$</td><td>-55 $\pm$ 3$^{\circ}C$</td><td>25 $\pm$ 2$^{\circ}C$</td><td>125 $\pm$ 3$^{\circ}C$</td><td>25 $\pm$ 2$^{\circ}C$</td></tr><tr><td>X6S/X5R</td><td>25 $\pm$ 2$^{\circ}C$</td><td>-55 $\pm$ 3$^{\circ}C$</td><td>25 $\pm$ 2$^{\circ}C$</td><td>85 $\pm$ 3$^{\circ}C$</td><td>25 $\pm$ 2$^{\circ}C$</td></tr><tr><td>Y5V</td><td>25 $\pm$ 2$^{\circ}C$</td><td>-30 $\pm$ 3$^{\circ}C$</td><td>25 $\pm$ 2$^{\circ}C$</td><td>85 $\pm$ 3$^{\circ}C$</td><td>25 $\pm$ 2$^{\circ}C$</td></tr></table> PS: C0G预先干燥: 16~24小时. C0G Preliminary Drying for 16~24hr. ▶ $C = [(C_i - C_1) / (C_1 \cdot \Delta T)] \cdot 10^6$ 或 (or) ▶ $C = (C_i - C_1) / C_1 \cdot 100\%$ C_1 : 1~5温度下的容值 Capacitance value at 1~5 temperature ▶ T: 温度变化量 (Temperature variation) ▶ $T = T_i - T_1$	步骤Step	1	2	3	4	5	C0G/X7R	25 $\pm$ 2 $^{\circ}C$	-55 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	125 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	X6S/X5R	25 $\pm$ 2 $^{\circ}C$	-55 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	85 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	Y5V	25 $\pm$ 2 $^{\circ}C$	-30 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	85 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$
步骤Step	1	2	3	4	5																							
C0G/X7R	25 $\pm$ 2 $^{\circ}C$	-55 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	125 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$																							
X6S/X5R	25 $\pm$ 2 $^{\circ}C$	-55 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	85 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$																							
Y5V	25 $\pm$ 2 $^{\circ}C$	-30 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$	85 $\pm$ 3 $^{\circ}C$	25 $\pm$ 2 $^{\circ}C$																							
8	附着力 Adhesion	C0G X7R X6S X5R	无明显的损伤或端电极脱落 No remarkable damage or removal of the terminations.	施加压力: 5N (0201: 2N; 01005: 1N) 时间: 10 $\pm$ 1秒 Pressurizing force: 5N (0201: 2N; 01005: 1N) time: 10 $\pm$ 1sec 																								

■ 技术指标和实验方法 Specifications and Test Method

NO	项目 Item	技术指标 Specification		实验方法 Test Method															
9	可焊性 Solderability	C0G X7R X6S X5R Y5V	端电极挂锡面积小于95% 95%min.coverage of both terminal electrodes	锡炉温度: 245±5℃ 浸入时间: 2±1秒 Solder temperature:245±5℃ Dipping time: 2±1sec.															
10	弯曲强度 Bending	外观 Appreance	无明显可见损伤 No remarkable visual damage	将电容安在测试夹具上, 按图所示方向以1.0mm/s 的速率施加压力, 弯曲1mm. Solder the capacitor on testing substrate and putt on testing stand. The middle part of substrateshall successively be pressurized by pressuringrod at a rated of about 1.0mm/sec. Until the deflection become means of the 1.0mm. 															
		容量变化 Cap change	C0G: ±5%或±0.5pF, 取较大值 X7R/X6S/X5R: ±12.5% Y5V: ±30% C0G: within ±5% or ±0.5pF, whichever is larger X7R/X6S/X5R: within ±12.5 % Y5V: within ±30%																
*11	耐焊锡热 Resistance to Soldering Heat	外观 Appreance	无明显可见损伤 No remarkable visual damage	预热: 120~150℃ 60秒 焊接温度: 270±5℃ 浸入时间: 10±1秒 Preheating:120~150℃ 60sec Soldering temperature :270±5℃ Dipping time:10±1seconds															
		容量变化 Cap change	C0G: ±2.5%或±0.5pF,取较大值 X7R/X6S/X5R: ±15% Y5V: ±30% C0G: within ±2.5% or ±0.5pF, whichever is larger X7R/X6S/X5R: within ±15% Y5V: within ±30%																
		DF/IR	满足产品初始值得要求 Meets initial standard damage																
*12	温度快速循环 Temperature Cycle	外观 Appreance	无明显可见损伤 No remarkable visual damage	按下列步骤进行5次循环: To perform 5cycles of the stated environment <table><tr><th>步骤 Step</th><th>温度 Temperature</th><th>时间 Time</th></tr><tr><td>1</td><td>下限温度+0/-3℃ Min.operating Temp.+0/-3℃</td><td>30min</td></tr><tr><td>2</td><td>25℃</td><td>2~3min</td></tr><tr><td>3</td><td>上限温度+3/-0℃ Min.operating Temp.+3/-0℃</td><td>30min</td></tr><tr><td>4</td><td>25℃</td><td>2~3min</td></tr></table>	步骤 Step	温度 Temperature	时间 Time	1	下限温度+0/-3℃ Min.operating Temp.+0/-3℃	30min	2	25℃	2~3min	3	上限温度+3/-0℃ Min.operating Temp.+3/-0℃	30min	4	25℃	2~3min
		步骤 Step	温度 Temperature		时间 Time														
		1	下限温度+0/-3℃ Min.operating Temp.+0/-3℃		30min														
2	25℃	2~3min																	
3	上限温度+3/-0℃ Min.operating Temp.+3/-0℃	30min																	
4	25℃	2~3min																	
容量变化 Cap change	C0G: ±2.5%或±0.25pF,取较大值 X7R/X6S/X5R: ±15% Y5V: ±30% C0G: within ±2.5% or ±0.25pF, whichever is larger X7R/X6S/X5R: within ±15% Y5V: within ±30%																		
DF/IR	满足产品初始值得要求 Meets initial standard damage																		

NO	项目 Item	技术指标 Specification		实验方法 Test Method
*13	耐湿负荷 Damp heat with load	外观 Appreance	无明显可见损伤 No remarkable visual damage	测试温度: $40 \pm 2^{\circ}\text{C}$ 相对湿度: 90~95%RH 测试电压: 额定电压 (最大500V) 测试时间: $500 \pm 12\text{hrs}$ Test temperature: $40 \pm 2^{\circ}\text{C}$ Humidity:90~95% RH Voltage:100% of the rated voltage(max:500V) Testing time: $500 \pm 12\text{hrs}$
		容量变化 Cap change	$\text{C0G:} \pm 7.5\%$ 或 $\pm 0.75\text{pF}$,取较大值 $\text{X7R/X6S/X5R:} \pm 25\%$ $\text{Y5V:} \pm 30\%$ 或 $-40\% \sim +30\%$ $\text{C0G:within} \pm 7.5\%$ or $\pm 0.75\text{pF}$, whichever is larger $\text{X7R/X6S/X5R: within} \pm 25\%$ $\text{Y5V:within} \pm 30\%$ 或 $-40\% \sim +30\%$	
		DF	初始值的2倍以下 Not more than 2 times of initial value	
		IR	$\text{Ri} > 500\text{M}\Omega$ 或 $25\Omega \cdot \text{F}$ (☆为 $5\Omega \cdot \text{F}$), 取较小值 $\text{Ri} > 500\text{M}\Omega$ 或 $25\Omega \cdot \text{F}$ ($5\Omega \cdot \text{F}$ of ☆), whichever is smaller	
*14	耐久性 Life Test	外观 Appreance	无明显可见损伤 No remarkable visual damage	温度测试: 上限类别温度 $\pm 3^{\circ}\text{C}$ 测试电压: $\text{U}_\text{R} < 100\text{V}$ 150% $100\text{V} \leq \text{U}_\text{R} < 1000\text{V}$ 120% $\text{U}_\text{R} \geq 1000\text{V}$ 100% 测试时间: 1000小时 Test temperature:Max.Operating Temp. $\pm 3^{\circ}\text{C}$ Voltage: $\text{U}_\text{R} < 100\text{V}$ 150% $100\text{V} \leq \text{U}_\text{R} < 1000\text{V}$ 120% $\text{U}_\text{R} \geq 1000\text{V}$ 100% Testing time: 1000hrs
		容量变化 Cap change	$\text{C0G:} \pm 3\%$ 或 $\pm 0.5\text{pF}$,取较大值 $\text{X7R/X6S/X5R:} \pm 25\%$ $\text{Y5V:} \pm 30\%$ 或 $-40\% \sim +30\%$ $\text{C0G:within} \pm 3\%$ or $\pm 0.5\text{pF}$, whichever is larger $\text{X7R/X6S/X5R: within} \pm 25\%$ $\text{Y5V:within} \pm 30\%$ 或 $-40\% \sim +30\%$	
		DF	初始值的2倍以下 Not more than 2 times of initial value	
		IR	$\text{Ri} > 1\text{G}\Omega$ 或 $50\Omega \cdot \text{F}$ (☆为 $10\Omega \cdot \text{F}$), 取较小值 $\text{Ri} > 1\text{G}\Omega$ 或 $50\Omega \cdot \text{F}$ ($10\Omega \cdot \text{F}$ of ☆), whichever is smaller	

注:

*A.3.7.11.12.13.14项需对II类电容器做预处理(将电容器在 160°C 下热处理1小时),然后在标准大气条件下恢复 48 ± 4 小时,再测量初始值;

B.3.11.12.13.14项实验后在室温下放置 24 ± 2 (C0G)或 48 ± 4 (X7R、X6S、X5R、Y5V)小时以后再测量;

C.3.11.12.13.14项电性能测量的环境条件,温度: $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 相对湿度: 25%~80%RH。

☆ ■ 100V:X7R

■ 50V:0402>103; 0603≥105;0805≥105;1206≥475;1210≥475

■ 25V:0201≥104;0402≥224 0603≥225; 0805≥225;1206≥106;1210≥106;01005(X6S/X5R)

■ 16V: 0201≥104;0402≥224;0603≥105; 0805≥225;1206≥106;1210≥476; 01005(X6S/X5R)

■ 10V: 0201≥473;0402≥474;0603≥474; 0805≥225;1206≥475;1210≥476; 01005(X6S/X5R)

■ ≤6.3V Class II; 01005(X6S/X5R)

Note:

A.3.7.11.12.13.14Item need to do the pretreatment of class II type capacitor(Perform a heat treatment at 160°C for 1 hour), Then recovery the capacitor at standard pressure conditions for 48 ± 4 hours,Perform the initial measurement

B.3.11.12.13.14Item end of experiment Measurement to be made after being kept at room temperature for 24 ± 2 (C0G) or 48 ± 4 (X7R、X6S、X5R、Y5V)hrs.

C.3.11.12.13.14Item environmental conditions for electrical performance measurement, Temperature: $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Humidity: 25%~80%RH