

# DATA SHEET

## SURFACE-MOUNT CERAMIC MULTILAYER CAPACITORS

Mid-voltage

NP0/X7R

100 V TO 630 V

0.47 pF to 2.2  $\mu$ F

RoHS compliant & Halogen Free



**SCOPE**

This specification describes Mid-voltage NP0/X7R series chip capacitors with lead-free terminations.

**APPLICATIONS**

PCs, Hard disk, Game PCs  
Power supplies  
LCD panel  
ADSL, Modem

**FEATURES**

Supplied in tape on reel  
Nickel-barrier end termination  
RoHS compliant  
Halogen Free compliant

**ORDERING INFORMATION - GLOBAL PART NUMBER, PHYCOMP CTC & I2NC**

All part numbers are identified by the series, size, tolerance, TC material, packing style, voltage, process code, termination and capacitance value.

**YAGEO BRAND ordering code****GLOBAL PART NUMBER (PREFERRED)**

**CC**   XXXX X X XXX X **B** X XXX  
(1)   (2) (3) (4) (5)   (6) (7)

**(1) SIZE – INCH BASED (METRIC)**

0201 (0603) / 0402 (1005) / 0603 (1608) / 0805 (2012) / 1206 (3216) / 1210 (3225)  
1808 (4520) / 1812 (4532)

**(2) TOLERANCE**

B =  $\pm 0.1$  pF  
C =  $\pm 0.25$  pF  
D =  $\pm 0.5$  pF  
F =  $\pm 1\%$   
G =  $\pm 2\%$   
J =  $\pm 5\%$   
K =  $\pm 10\%$   
M =  $\pm 20\%$

**(3) PACKING STYLE**

R = Paper/PE taping reel; Reel 7 inch  
K = Blister taping reel; Reel 7 inch  
P = Paper/PE taping reel; Reel 13 inch  
F = Blister taping reel; Reel 13 inch  
C = Bulk case

**(4) TC MATERIAL**

NPO  
X7R

**(5) RATED VOLTAGE**

0 = 100 V  
A = 200 V  
Y = 250 V  
B = 500 V  
Z = 630 V

**(6) PROCESS**

N = NPO  
B = Class 2 MLCC

**(7) CAPACITANCE VALUE**

2 significant digits+number of zeros  
The 3rd digit signifies the multiplying factor, and letter R is decimal point  
Example: 121 =  $12 \times 10^1 = 120$  pF

## CONSTRUCTION

The capacitor consists of a rectangular block of ceramic dielectric in which a number of interleaved metal electrodes are contained. This structure gives rise to a high capacitance per unit volume.

The inner electrodes are connected to the two end terminations and finally covered with a layer of plated tin (NiSn). The terminations are lead-free. A cross section of the structure is shown in Fig.1.

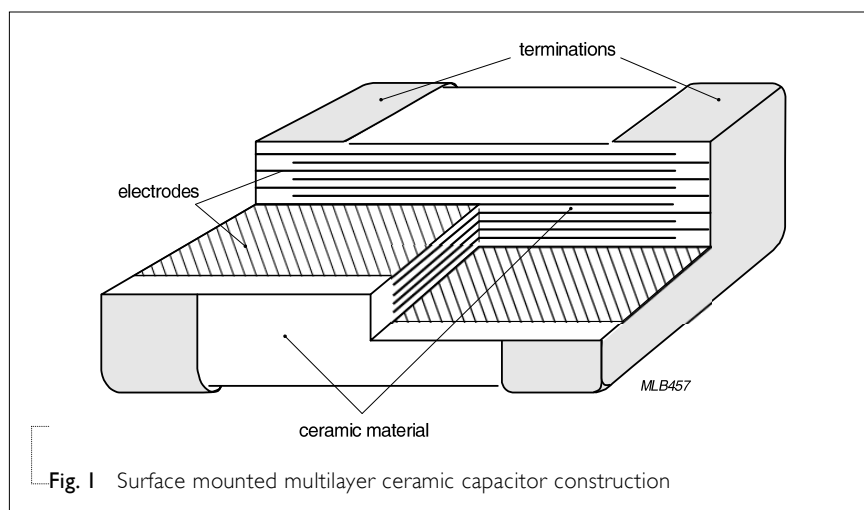


Fig. 1 Surface mounted multilayer ceramic capacitor construction

## DIMENSION

Table I For outlines see fig. 2

| TYPE | L <sub>1</sub> (mm) | W (mm)     | T (MM)     | L <sub>2</sub> / L <sub>3</sub> (mm) |      | L <sub>4</sub> (mm) |
|------|---------------------|------------|------------|--------------------------------------|------|---------------------|
|      |                     |            |            | min.                                 | max. | min.                |
| 0201 | 0.6 ±0.03           | 0.3±0.03   | 0.3±0.03   | 0.10                                 | 0.20 | 0.20                |
| 0402 | 1.0 ±0.05           | 0.5 ±0.05  | 0.5 ±0.05  | 0.15                                 | 0.30 | 0.40                |
| 0603 | 1.6 ±0.10           | 0.8 ±0.10  | 0.8 ±0.10  | 0.20                                 | 0.60 | 0.40                |
| 0805 | 2.0 ±0.20           | 1.25 ±0.20 | 0.6 ±0.10  | 0.25                                 | 0.75 | 0.70                |
|      |                     |            | 0.85 ±0.10 |                                      |      |                     |
|      |                     |            | 1.25 ±0.20 |                                      |      |                     |
| 1206 | 3.2 ±0.30           | 1.6 ±0.20  | 0.6 ±0.10  | 0.25                                 | 0.75 | 1.40                |
|      |                     |            | 0.85 ±0.10 |                                      |      |                     |
|      |                     |            | 1.25 ±0.20 |                                      |      |                     |
|      |                     |            | 1.6 ±0.20  |                                      |      |                     |
| 1210 | 3.2 ±0.30           | 2.5 ±0.20  | 1.6 ±0.30  | 0.25                                 | 0.75 | 1.40                |
|      |                     |            | 0.85 ±0.10 |                                      |      |                     |
|      |                     |            | 1.25 ±0.20 |                                      |      |                     |
| 1808 | 4.5 ±0.40           | 2.0 ±0.30  | 2.0 ±0.20  | 0.25                                 | 0.75 | 2.20                |
| 1812 | 4.5 ±0.40           | 3.2 ±0.30  | 0.85 ±0.10 | 0.25                                 | 0.75 | 2.20                |
|      |                     |            | 1.25 ±0.20 |                                      |      |                     |
|      |                     |            | 1.6 ±0.20  |                                      |      |                     |

## OUTLINES

For dimension see Table I

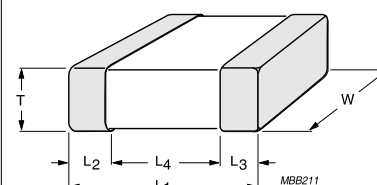


Fig. 2 Surface mounted multilayer ceramic capacitor dimension

**CAPACITANCE RANGE & THICKNESS FOR NP0****Table 2** Sizes from 0201 to 0805

| CAP.    | 0201<br>100V | 0402<br>100V | 0603<br>100 V | 200 V   | 250 V   | 0805<br>100 V | 200 V   | 250 V   | 500 V   | 630V    |
|---------|--------------|--------------|---------------|---------|---------|---------------|---------|---------|---------|---------|
| 0.22 pF |              |              |               |         |         |               |         |         |         |         |
| 0.47 pF |              |              |               |         |         |               |         |         |         |         |
| 0.56 pF |              |              |               |         |         |               |         |         |         |         |
| 0.68 pF |              |              |               |         |         |               |         |         |         |         |
| 0.82 pF |              |              |               |         |         |               |         |         |         |         |
| 1.0 pF  |              |              |               |         |         |               |         |         |         |         |
| 1.2 pF  |              |              |               |         |         |               |         |         |         |         |
| 1.5 pF  |              |              |               |         |         |               |         |         |         |         |
| 1.8 pF  |              |              |               |         |         |               |         |         |         |         |
| 2.2 pF  |              |              |               |         |         |               |         |         |         |         |
| 2.7 pF  |              |              |               |         |         |               |         |         |         |         |
| 3.3 pF  |              |              |               |         |         |               |         |         |         |         |
| 3.9 pF  |              |              |               |         |         |               |         |         |         |         |
| 4.7 pF  |              |              |               |         |         |               |         |         |         |         |
| 5.6 pF  | 0.3±0.03     | 0.5±0.05     | 0.8±0.1       | 0.8±0.1 | 0.8±0.1 | 0.6±0.1       | 0.6±0.1 | 0.6±0.1 | 0.6±0.1 | 0.6±0.1 |
| 6.8 pF  |              |              |               |         |         |               |         |         |         |         |
| 8.2 pF  |              |              |               |         |         |               |         |         |         |         |
| 10 pF   |              |              |               |         |         |               |         |         |         |         |
| 12 pF   |              |              |               |         |         |               |         |         |         |         |
| 15 pF   |              |              |               |         |         |               |         |         |         |         |
| 18 pF   |              |              |               |         |         |               |         |         |         |         |
| 22 pF   |              |              |               |         |         |               |         |         |         |         |
| 27 pF   |              |              |               |         |         |               |         |         |         |         |
| 33 pF   |              |              |               |         |         |               |         |         |         |         |
| 39 pF   |              |              |               |         |         |               |         |         |         |         |
| 47 pF   |              |              |               |         |         |               |         |         |         |         |
| 56 pF   |              |              |               |         |         |               |         |         |         |         |
| 68 pF   |              |              |               |         |         |               |         |         |         |         |
| 82 pF   |              |              |               |         |         |               |         |         |         |         |
| 100 pF  |              |              |               |         |         |               |         |         |         |         |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request

**CAPACITANCE RANGE & THICKNESS FOR NP0**
**Table 3** Sizes from 0603 to 0805 (continued)

| CAP.   | 0402<br>100 V | 0603<br>100 V | 200 V   | 250 V   | 0805<br>100 V | 200 V    | 250 V    | 500 V    | 630 V    |
|--------|---------------|---------------|---------|---------|---------------|----------|----------|----------|----------|
| 120 pF |               |               |         |         |               |          |          |          |          |
| 150 pF |               |               |         |         |               | 0.6±0.1  | 0.6±0.1  | 0.6±0.1  | 0.6±0.1  |
| 180 pF |               |               |         |         |               |          |          |          |          |
| 220 pF |               |               |         |         |               |          |          |          |          |
| 270 pF |               |               | 0.8±0.1 | 0.8±0.1 |               |          |          |          |          |
| 330 pF | 0.5±0.05      |               |         |         | 0.6±0.1       |          |          | 0.85±0.1 | 0.85±0.1 |
| 390 pF |               | 0.8±0.1       |         |         |               | 0.85±0.1 | 0.85±0.1 |          |          |
| 470 pF |               |               |         |         |               |          |          |          |          |
| 560 pF |               |               |         |         |               |          |          |          |          |
| 680 pF |               |               |         |         |               |          |          | 1.25±0.2 | 1.25±0.2 |
| 820 pF |               |               |         |         |               |          |          |          |          |
| 1.0 nF |               |               |         |         |               |          |          |          |          |
| 1.2 nF |               |               |         |         |               |          |          |          |          |
| 1.5 nF |               |               |         |         | 0.85±0.1      |          |          |          |          |
| 1.8 nF |               |               |         |         |               |          |          |          |          |
| 2.2 nF |               |               |         |         |               | 1.25±0.2 | 1.25±0.2 |          |          |
| 2.7 nF |               |               |         |         |               |          |          |          |          |
| 3.3 nF |               |               |         |         |               |          |          |          |          |
| 3.9 nF |               |               |         |         |               |          |          |          |          |
| 4.7 nF |               |               |         |         | 1.25±0.2      |          |          |          |          |
| 5.6 nF |               |               |         |         |               |          |          |          |          |
| 6.8 nF |               |               |         |         |               |          |          |          |          |
| 8.2 nF |               |               |         |         |               |          |          |          |          |
| 10 nF  |               |               |         |         |               |          |          |          |          |
| 12 nF  |               |               |         |         |               |          |          |          |          |
| 15 nF  |               |               |         |         |               |          |          |          |          |
| 18 nF  |               |               |         |         |               |          |          |          |          |
| 22 nF  |               |               |         |         |               |          |          |          |          |

**NOTE**

- Values in shaded cells indicate thickness class in mm
- Capacitance value of non E-12 series is on request

**CAPACITANCE RANGE & THICKNESS FOR NP0**
**Table 4** Sizes from 1206 to 1210

| CAP.    | 1206    |         |         |         |          | 1210     |          |          |          |          |
|---------|---------|---------|---------|---------|----------|----------|----------|----------|----------|----------|
|         | 100 V   | 200 V   | 250 V   | 500 V   | 630 V    | 100 V    | 200 V    | 250 V    | 500 V    | 630 V    |
| 0.47 pF |         |         |         |         |          |          |          |          |          |          |
| 0.56 pF |         |         |         |         |          |          |          |          |          |          |
| 0.68 pF |         |         |         |         |          |          |          |          |          |          |
| 0.82 pF |         |         |         |         |          |          |          |          |          |          |
| 1.0 pF  |         |         |         |         |          |          |          |          |          |          |
| 1.2 pF  |         |         |         |         |          |          |          |          |          |          |
| 1.5 pF  |         |         |         |         |          |          |          |          |          |          |
| 1.8 pF  |         |         |         |         |          |          |          |          |          |          |
| 2.2 pF  |         |         |         |         |          |          |          |          |          |          |
| 2.7 pF  |         |         |         |         |          |          |          |          |          |          |
| 3.3 pF  |         |         |         |         |          |          |          |          |          |          |
| 3.9 pF  |         |         |         |         |          |          |          |          |          |          |
| 4.7 pF  |         |         |         |         |          |          |          |          |          |          |
| 5.6 pF  |         |         |         |         |          |          |          |          |          |          |
| 6.8 pF  | 0.6±0.1 | 0.6±0.1 | 0.6±0.1 |         |          |          |          |          |          |          |
| 8.2 pF  |         |         |         |         |          |          |          |          |          |          |
| 10 pF   |         |         |         |         |          |          |          |          |          |          |
| 12 pF   |         |         |         |         |          |          |          |          |          |          |
| 15 pF   |         |         |         |         |          |          |          |          |          |          |
| 18 pF   |         |         |         |         |          |          |          |          |          |          |
| 22 pF   |         |         |         |         |          |          |          |          |          |          |
| 27 pF   |         |         |         | 0.6±0.1 | 1.25±0.2 |          |          |          |          |          |
| 33 pF   |         |         |         |         |          |          |          |          |          |          |
| 39 pF   |         |         |         |         |          |          |          |          |          |          |
| 47 pF   |         |         |         |         |          |          |          |          |          |          |
| 56 pF   |         |         |         |         |          |          |          |          |          |          |
| 68 pF   |         |         |         |         |          | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |
| 82 pF   |         |         |         |         |          |          |          |          |          | 1.25±0.2 |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request

**CAPACITANCE RANGE & THICKNESS FOR NP0****Table 5** Sizes from 1206 to 1210 (continued)

| CAP.   | 1206    |         |         |         |          | 1210     |          |          |          |          |
|--------|---------|---------|---------|---------|----------|----------|----------|----------|----------|----------|
|        | 100 V   | 200 V   | 250 V   | 500 V   | 630 V    | 100 V    | 200 V    | 250 V    | 500 V    | 630 V    |
| 100 pF | 0.6±0.1 | 0.6±0.1 | 0.6±0.1 | 0.6±0.1 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |
| 120 pF |         |         |         |         |          |          |          |          |          |          |
| 150 pF |         |         |         |         |          |          |          |          |          |          |
| 180 pF |         |         |         |         |          |          |          |          |          |          |
| 220 pF |         |         |         |         |          |          |          |          |          |          |
| 270 pF |         |         |         |         |          |          |          |          |          |          |
| 330 pF |         |         |         |         |          |          |          |          |          |          |
| 390 pF |         |         |         |         |          |          |          |          |          |          |
| 470 pF |         |         |         |         |          |          |          |          |          |          |
| 560 pF |         |         |         |         |          |          |          |          |          |          |
| 680 pF |         |         |         |         |          |          |          |          |          |          |
| 820 pF |         |         |         |         |          |          |          |          |          |          |
| 1.0 nF |         |         |         |         |          |          |          |          |          |          |
| 1.2 nF |         |         |         |         |          |          |          |          |          |          |
| 1.5 nF |         |         |         |         |          |          |          |          |          |          |
| 1.8 nF |         |         |         |         |          |          |          |          |          |          |
| 2.2 nF |         |         |         |         |          |          |          |          |          |          |
| 2.7 nF |         |         |         |         |          |          |          |          |          |          |
| 3.3 nF |         |         |         |         |          |          |          |          |          |          |
| 3.9 nF |         |         |         |         |          |          |          |          |          |          |
| 4.7 nF |         |         |         |         |          |          |          |          |          |          |
| 5.6 nF |         |         |         |         |          |          |          |          |          |          |
| 6.8 nF |         |         |         |         |          |          |          |          |          |          |
| 8.2 nF |         |         |         |         |          |          |          |          |          |          |
| 10 nF  |         |         |         |         |          |          |          |          |          |          |
| 12 nF  |         |         |         |         |          |          |          |          |          |          |
| 15 nF  |         |         |         |         |          |          |          |          |          |          |
| 18 nF  |         |         |         |         |          |          |          |          |          |          |
| 22 nF  |         |         |         |         |          |          |          |          |          |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request

**CAPACITANCE RANGE & THICKNESS FOR NP0****Table 6** Sizes I812

| CAP.   | I812     |          |          |          |          |
|--------|----------|----------|----------|----------|----------|
|        | 100 V    | 200 V    | 250 V    | 500 V    | 630V     |
| 10 pF  |          |          |          |          |          |
| 12 pF  |          |          |          |          |          |
| 15 pF  |          |          |          |          |          |
| 18 pF  |          |          |          |          |          |
| 22 pF  |          |          |          |          |          |
| 27 pF  |          |          |          |          |          |
| 33 pF  |          |          |          |          |          |
| 39 pF  |          |          |          |          |          |
| 47 pF  |          |          |          |          |          |
| 56 pF  |          |          |          |          |          |
| 68 pF  |          |          |          |          |          |
| 82 pF  |          |          |          |          |          |
| 100 pF |          |          |          |          |          |
| 120 pF |          |          |          |          |          |
| 150 pF |          |          |          |          |          |
| 180 pF |          |          |          |          |          |
| 220 pF |          |          |          |          |          |
| 270 pF |          |          |          |          |          |
| 330 pF |          |          |          |          | 1.25±0.2 |
| 390 pF |          |          |          |          |          |
| 470 pF |          |          |          |          |          |
| 560 pF |          |          |          | 1.25±0.2 |          |
| 680 pF |          |          |          |          |          |
| 820 pF |          |          |          |          |          |
| 1 nF   |          |          |          |          |          |
| 1.2 nF |          | 1.25±0.2 | 1.25±0.2 |          |          |
| 1.5 nF |          |          |          |          |          |
| 1.8 nF |          |          |          |          |          |
| 2.2 nF |          |          |          |          |          |
| 2.7 nF | 1.25±0.2 |          |          |          |          |
| 3.3 nF |          |          |          |          |          |
| 3.9 nF |          |          |          |          |          |
| 4.7 nF |          |          |          |          |          |
| 5.6 nF |          |          |          |          |          |
| 6.8 nF |          |          |          |          |          |
| 8.2 nF |          |          |          |          |          |
| 10 nF  |          |          |          |          |          |
| 12 nF  |          |          |          |          |          |
| 15 nF  |          |          |          |          |          |
| 18 nF  |          |          |          |          |          |
| 22 nF  |          |          |          |          |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-12 series is on request



**CAPACITANCE RANGE & THICKNESS FOR X7R**
**Table 7** Sizes from 0402 to 0805

| CAP.   | 0402<br>100 V | 0603<br>100 V | 250 V   | 0805<br>100 V | 200 V    | 250 V    | 500 V    | 630 V    |
|--------|---------------|---------------|---------|---------------|----------|----------|----------|----------|
| 100 pF |               |               |         |               |          |          |          |          |
| 150 pF |               |               |         |               |          |          |          |          |
| 220 pF |               |               |         |               |          |          |          |          |
| 330 pF |               |               |         |               |          |          |          |          |
| 470 pF |               |               |         |               |          |          |          |          |
| 680 pF |               |               |         |               |          |          |          |          |
| 1.0 nF | 0.5±0.05      |               |         |               | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 | 0.85±0.1 |
| 1.5 nF |               |               |         | 0.6±0.1       |          |          |          |          |
| 2.2 nF |               |               | 0.8±0.1 |               |          |          |          |          |
| 3.3 nF |               | 0.8±0.1       |         |               |          |          |          |          |
| 4.7 nF |               |               |         |               |          |          |          |          |
| 6.8 nF |               |               |         |               |          |          |          |          |
| 10 nF  |               |               |         |               |          |          |          | 1.25±0.2 |
| 15 nF  |               |               |         | 0.85±0.1      | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |
| 22 nF  |               |               |         |               |          |          |          |          |
| 33 nF  |               |               |         |               |          |          |          |          |
| 47 nF  |               |               |         |               |          |          |          |          |
| 68 nF  |               |               |         |               |          |          |          |          |
| 100 nF |               |               |         | 1.25±0.2      |          |          |          |          |
| 150 nF |               |               |         |               |          |          |          |          |
| 220 nF |               |               |         |               |          |          |          |          |
| 330 nF |               |               |         |               |          |          |          |          |
| 470 nF |               |               |         |               |          |          |          |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For special ordering code, please contact local sales force before order
4. For product with 5% tolerance, please contact local sales force before order

**CAPACITANCE RANGE & THICKNESS FOR X7R****Table 8** Sizes from 1206 to 1210

| CAP.   | 1206     |          |          |          |          | 1210     |          |          |          |          |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
|        | 100 V    | 200 V    | 250 V    | 500 V    | 630 V    | 100 V    | 200 V    | 250 V    | 500 V    | 630V     |
| 100 pF |          |          |          |          |          |          |          |          |          |          |
| 150 pF |          |          |          |          |          |          |          |          |          |          |
| 220 pF |          |          |          |          |          |          |          |          |          |          |
| 330 pF |          |          |          |          |          |          |          |          |          |          |
| 470 pF |          |          |          |          |          |          |          |          |          |          |
| 680 pF |          |          |          |          |          |          |          |          |          |          |
| 1.0 nF |          |          |          |          |          |          |          |          |          |          |
| 1.5 nF |          |          |          |          |          |          |          |          |          |          |
| 2.2 nF |          | 0.85±0.1 | 0.85±0.1 | 1.25±0.2 | 1.25±0.2 |          |          |          |          |          |
| 3.3 nF | 0.85±0.1 |          |          |          |          |          |          |          |          |          |
| 4.7 nF |          |          |          |          |          |          | 0.85±0.1 | 0.85±0.1 |          |          |
| 6.8 nF |          |          |          |          |          |          |          |          |          |          |
| 10 nF  |          |          |          |          |          |          |          |          | 1.25±0.2 | 1.25±0.2 |
| 15 nF  |          |          |          |          |          | 0.85±0.1 |          |          |          |          |
| 22 nF  |          |          |          |          |          |          |          |          |          |          |
| 33 nF  |          | 1.25±0.2 | 1.25±0.2 | 1.6±0.2  | 1.6±0.2  |          |          |          |          | 1.6±0.2  |
| 47 nF  |          |          |          |          |          |          |          |          |          |          |
| 68 nF  |          |          |          |          |          |          | 1.25±0.2 | 1.25±0.2 |          |          |
| 100 nF |          | 1.6±0.2  | 1.6±0.2  |          |          |          |          |          |          |          |
| 150 nF | 1.25±0.2 |          |          |          |          |          |          |          |          |          |
| 220 nF |          |          |          |          |          | 1.25±0.2 |          |          |          |          |
| 330 nF | 1.6±0.2  |          |          |          |          |          |          |          |          |          |
| 470 nF |          |          |          |          |          |          |          |          |          |          |
| 680 nF |          |          |          |          |          |          |          |          |          |          |
| 1 µF   | 1.6±0.2  |          |          |          |          | 2.0±0.2  |          |          |          |          |
| 2.2 µF | 1.6±0.3  |          |          |          |          |          |          |          |          |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For product with 5% tolerance, please contact local sales force before order

CAPACITANCE RANGE & THICKNESS FOR X7R

Table 9 Sizes from 1808 to 1812

| CAP.   | 1808     |          |          |          | 1812     |          |          |          |          |
|--------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
|        | 100 V    | 200 V    | 250 V    | 500 V    | 100 V    | 200 V    | 250 V    | 500 V    | 630 V    |
| 100 pF |          |          |          |          |          |          |          |          |          |
| 150 pF |          |          |          |          |          |          |          |          |          |
| 220 pF |          |          |          |          |          |          |          |          |          |
| 330 pF |          |          |          |          |          |          |          |          |          |
| 470 pF |          |          |          |          |          |          |          |          |          |
| 680 pF |          |          |          |          |          |          |          |          |          |
| 1.0 nF |          |          |          |          |          |          |          |          |          |
| 1.5 nF |          |          |          |          |          |          |          |          |          |
| 2.2 nF |          |          |          |          |          |          |          |          |          |
| 3.3 nF |          |          |          |          |          |          |          |          |          |
| 4.7 nF |          |          |          |          |          |          |          |          | 1.35±0.2 |
| 6.8 nF |          |          |          |          |          | 0.85±0.1 | 0.85±0.1 |          |          |
| 10 nF  |          |          |          |          | 0.85±0.1 |          |          | 1.25±0.2 |          |
| 15 nF  |          |          |          | 1.25±0.2 |          |          |          |          |          |
| 22 nF  | 1.25±0.2 | 1.25±0.2 | 1.25±0.2 |          |          |          |          |          |          |
| 33 nF  |          |          |          |          |          |          |          |          | 1.6±0.2  |
| 47 nF  |          |          |          |          |          |          |          |          |          |
| 68 nF  |          |          |          |          |          |          |          |          |          |
| 100 nF |          |          |          |          |          | 1.25±0.2 | 1.25±0.2 | 1.6±0.2  |          |
| 150 nF |          |          |          |          |          |          |          |          |          |
| 220 nF |          |          |          |          | 1.25±0.2 |          |          |          |          |
| 330 nF |          |          |          |          |          | 1.6±0.2  | 1.6±0.2  |          |          |
| 470 nF |          |          |          |          |          |          |          |          |          |
| 680 nF |          |          |          |          | 1.6±0.2  |          |          |          |          |
| 1 µF   |          |          |          |          |          |          |          |          |          |

**NOTE**

1. Values in shaded cells indicate thickness class in mm
2. Capacitance value of non E-6 series is on request
3. For product with 5% tolerance, please contact local sales force before order

**THICKNESS CLASSES AND PACKING QUANTITY**

Table 10

| SIZE CODE | THICKNESS CLASSIFICATION | TAPE WIDTH<br>QUANTITY PER REEL | Ø180 MM / 7 INCH |                | Ø330 MM / 13 INCH |         | QUANTITY<br>PER BULK CASE |
|-----------|--------------------------|---------------------------------|------------------|----------------|-------------------|---------|---------------------------|
|           |                          |                                 | Paper            | Blister        | Paper             | Blister |                           |
| 0201      | 0.3 ±0.03 mm             | 8 mm                            | 15,000           | ---            | 50,000            | ---     | ---                       |
| 0402      | 0.5 ±0.05 mm             | 8 mm                            | 10,000           | ---            | 50,000            | ---     | 50,000                    |
| 0603      | 0.8 ±0.1 mm              | 8 mm                            | 4,000            | ---            | 15,000            | ---     | 15,000                    |
| 0805      | 0.6 ±0.1 mm              | 8 mm                            | 4,000            | ---            | 20,000            | ---     | 10,000                    |
|           | 0.8 / 0.85 ±0.1 mm       | 8 mm                            | 4,000            | ---            | 15,000            | ---     | 8,000                     |
|           | 1.25 ±0.2 mm             | 8 mm                            | ---              | 3,000          | ---               | 10,000  | 5,000                     |
| 1206      | 0.6 ±0.1 mm              | 8 mm                            | 4,000            | ---            | 20,000            | ---     | ---                       |
|           | 0.8 / 0.85 ±0.1 mm       | 8 mm                            | 4,000            | ---            | 15,000            | ---     | ---                       |
|           | 1.00 / 1.15 ±0.1 mm      | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.25 ±0.2 mm             | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.6 ±0.15 mm             | 8 mm                            | ---              | 2,500          | ---               | 10,000  | ---                       |
|           | 1.6 ±0.2 mm              | 8 mm                            | ---              | 2,000          | ---               | 8,000   | ---                       |
| 1210      | 0.6 / 0.7 ±0.1 mm        | 8 mm                            | ---              | 4,000          | ---               | 15,000  | ---                       |
|           | 0.85 ±0.1 mm             | 8 mm                            | ---              | 4,000          | ---               | 10,000  | ---                       |
|           | 1.15 ±0.1 mm             | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.15 ±0.15 mm            | 8 mm                            | ---              | 3,000          | ---               | 10,000  | ---                       |
|           | 1.25 ±0.2 mm             | 8 mm                            | ---              | 3,000          | ---               | ---     | ---                       |
|           | 1.5 ±0.1 mm              | 8 mm                            | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.6 / 1.9 ±0.2 mm        | 8 mm                            | ---              | 2,000          | ---               | ---     | ---                       |
|           | 2.0 ±0.2 mm              | 8 mm                            | ---              | 2,000<br>1,000 | ---               | ---     | ---                       |
|           | 2.5 ±0.2 mm              | 8 mm                            | ---              | 1,000<br>500   | ---               | ---     | ---                       |
| 1808      | 1.15 ±0.15 mm            | 12 mm                           | ---              | 3,000          | ---               | ---     | ---                       |
|           | 1.25 ±0.2 mm             | 12 mm                           | ---              | 3,000          | ---               | ---     | ---                       |
|           | 1.35 ±0.15 mm            | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.5 ±0.1 mm              | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.6 ±0.2 mm              | 12 mm                           | ---              | 2,000          | ---               | 8,000   | ---                       |
|           | 2.0 ±0.2 mm              | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
| 1812      | 0.6 / 0.85 ±0.1 mm       | 12 mm                           | ---              | 2,000          | ---               | ---     | ---                       |
|           | 1.15 ±0.1 mm             | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.15 ±0.15 mm            | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.25 ±0.2 mm             | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.35 ±0.15 mm            | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.5 ±0.1 mm              | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 1.6 ±0.2 mm              | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 2.0 ±0.2 mm              | 12 mm                           | ---              | 1,000          | ---               | ---     | ---                       |
|           | 2.5 ±0.2 mm              | 12 mm                           | ---              | 500            | ---               | ---     | ---                       |

ELECTRICAL CHARACTERISTICS**NP0/X7R DIELECTRIC CAPACITORS; NISN TERMINATIONS**

Unless otherwise specified, all test and measurements shall be made under standard atmospheric conditions for testing as given in 5.3 of IEC 60068-1:

- Temperature: 15 °C to 35 °C
- Relative humidity: 25% to 75%
- Air pressure: 86 kPa to 106 kPa

Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature.

The period as prescribed for recovery at the end of a test is normally sufficient for this purpose.

Table 11

| DESCRIPTION                                                                                          |                                                      | VALUE                                                                            |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------|
| Capacitance range                                                                                    |                                                      | 0.47 pF to 2.2 μF                                                                |
| Capacitance tolerance                                                                                |                                                      |                                                                                  |
| NP0                                                                                                  | C < 10 pF                                            | ±0.25 pF, ±0.5 pF                                                                |
|                                                                                                      | C ≥ 10 pF                                            | ±2%, ±5%, ±10%                                                                   |
| X7R                                                                                                  |                                                      | ±5% <sup>(1)</sup> , ±10%, ±20%                                                  |
| Dissipation factor (D.F.)                                                                            |                                                      |                                                                                  |
| NP0                                                                                                  | C < 30 pF                                            | ≤ 1 / ( 400 + 20C )                                                              |
|                                                                                                      | C ≥ 30 pF                                            | ≤ 0.1 %                                                                          |
| X7R                                                                                                  |                                                      | ≤ 2.5 %                                                                          |
| Exception                                                                                            | X7R/0603/100V, 12nF ≤ C ≤ 100nF, X7R/1206/2.2μF/100V |                                                                                  |
|                                                                                                      | X7R/1206/100V/1μF;<br>X7R/1210/100V/1μF and 2.2μF;   |                                                                                  |
| Insulation resistance after 1 minute at U <sub>r</sub> (DC)                                          |                                                      | R <sub>ins</sub> ≥ 10 GΩ or R <sub>ins</sub> × C ≥ 500 seconds whichever is less |
| Maximum capacitance change as a function of temperature<br>(temperature characteristic/coefficient): |                                                      |                                                                                  |
| NP0                                                                                                  |                                                      | ±30 ppm/°C                                                                       |
| X7R                                                                                                  |                                                      | ±15%                                                                             |
| Operating temperature range:                                                                         |                                                      |                                                                                  |
| NP0/X7R                                                                                              |                                                      | -55 °C to +125 °C                                                                |

**NOTE**

1. Capacitance tolerance ±5% doesn't available for X7R full product range, please contact local sales force before order

## SOLDERING RECOMMENDATION

Table 12

| SOLDERING METHOD | SIZE        | 0201 | 0402     | 0603     | 0805     | 1206     | ≥ 1210      |
|------------------|-------------|------|----------|----------|----------|----------|-------------|
| Reflow           | Reflow only |      | > 100 nF | > 1.0 μF | > 2.2 μF | > 2.2 μF | Reflow only |
| Reflow/Wave      |             |      | ≤ 100 nF | ≤ 1.0 μF | ≤ 2.2 μF | ≤ 2.2 μF | ---         |

## TESTS AND REQUIREMENTS

Table 12 Test procedures and requirements

| TEST                                  | TEST METHOD     | PROCEDURE                                                                                                                                                                                                                                                 | REQUIREMENTS                     |
|---------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Mounting                              | IEC 60384-21/22 | 4.3 The capacitors may be mounted on printed-circuit boards or ceramic substrates                                                                                                                                                                         | No visible damage                |
| Visual Inspection and Dimension Check | 4.4             | Any applicable method using × 10 magnification                                                                                                                                                                                                            | In accordance with specification |
| Capacitance                           | 4.5.1           | Class 1:<br>f = 1 MHz for C ≤ 1 nF, measuring at voltage 1 V <sub>rms</sub> at 20 °C<br>f = 1 KHz for C > 1 nF, measuring at voltage 1 V <sub>rms</sub> at 20 °C<br>Class 2:<br>f = 1 KHz for C ≤ 10 μF, measuring at voltage 1 V <sub>rms</sub> at 20 °C | Within specified tolerance       |
| Dissipation Factor (D.F.)             | 4.5.2           | Class 1:<br>f = 1 MHz for C ≤ 1 nF, measuring at voltage 1 V <sub>rms</sub> at 20 °C<br>f = 1 KHz for C > 1 nF, measuring at voltage 1 V <sub>rms</sub> at 20 °C<br>Class 2:<br>f = 1 KHz for C ≤ 10 μF, measuring at voltage 1 V <sub>rms</sub> at 20 °C | In accordance with specification |
| Insulation Resistance                 | 4.5.3           | U <sub>r</sub> ≤ 500 V: At U <sub>r</sub> for 1 minute<br>U <sub>r</sub> > 500 V: At 500 V for 1 minute                                                                                                                                                   | In accordance with specification |

| TEST                    | TEST METHOD           | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | REQUIREMENTS                                                                                                         |                 |   |      |   |                       |   |      |   |                       |   |
|-------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-----------------|---|------|---|-----------------------|---|------|---|-----------------------|---|
| Temperature coefficient | 4.6                   | Capacitance shall be measured by the steps shown in the following table.<br><br>The capacitance change should be measured after 5 min at each specified temperature stage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <General purpose series><br>Class I:<br>Δ C/C: ±30ppm<br><br>Class2:<br>X7R: Δ C/C: ±15%<br>Y5V: Δ C/C: 22~-82%      |                 |   |      |   |                       |   |      |   |                       |   |
|                         |                       | <table><tr><td>Step</td><td>Temperature(°C)</td></tr><tr><td>a</td><td>25±2</td></tr><tr><td>b</td><td>Lower temperature±3°C</td></tr><tr><td>c</td><td>25±2</td></tr><tr><td>d</td><td>Upper Temperature±2°C</td></tr><tr><td>e</td><td>25±2</td></tr></table> <p>(1) Class I</p> <p>Temperature Coefficient shall be calculated from the formula as below</p> $\text{Temp, Coefficient} = \frac{C2 - C1}{C1 \times \Delta T} \times 10^6 \text{ [ppm/°C]}$ <p>C1: Capacitance at step c<br/>C2: Capacitance at 125°C<br/>ΔT: 100°C(=125°C-25°C)</p> <p>(2) Class II</p> <p>Capacitance Change shall be calculated from the formula as below</p> $\Delta C = \frac{C2 - C1}{C1} \times 100\%$ <p>C1: Capacitance at step c<br/>C2: Capacitance at step b or d</p> | Step                                                                                                                 | Temperature(°C) | a | 25±2 | b | Lower temperature±3°C | c | 25±2 | d | Upper Temperature±2°C | e |
| Step                    | Temperature(°C)       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                      |                 |   |      |   |                       |   |      |   |                       |   |
| a                       | 25±2                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                      |                 |   |      |   |                       |   |      |   |                       |   |
| b                       | Lower temperature±3°C |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                      |                 |   |      |   |                       |   |      |   |                       |   |
| c                       | 25±2                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                      |                 |   |      |   |                       |   |      |   |                       |   |
| d                       | Upper Temperature±2°C |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                      |                 |   |      |   |                       |   |      |   |                       |   |
| e                       | 25±2                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                      |                 |   |      |   |                       |   |      |   |                       |   |
| Adhesion                | IEC 60384-21/22       | 4.7 A force applied for 10 seconds to the line joining the terminations and in a plane parallel to the substrate                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Force size ≥ 0603: 5N                                                                                                |                 |   |      |   |                       |   |      |   |                       |   |
| Bending Strength        |                       | 4.8 Mounting in accordance with IEC 60384-22 paragraph 4.3<br><br>Conditions: bending 1 mm at a rate of 1 mm/s, radius jig 5 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | No visible damage<br><br>ΔC/C<br>Class I:<br>NP0: within ±1% or 0.5 pF, whichever is greater<br>Class2:<br>X7R: ±10% |                 |   |      |   |                       |   |      |   |                       |   |

| TEST                         | TEST METHOD             | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                             | REQUIREMENTS                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resistance to Soldering Heat | 4.9                     | <p>Precondition: 150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature</p> <p>Preheating: for size ≤ 1206: 120 °C to 150 °C for 1 minute</p> <p>Preheating: for size &gt;1206: 100 °C to 120 °C for 1 minute and 170 °C to 200 °C for 1 minute</p> <p>Solder bath temperature: 260 ±5 °C</p> <p>Dipping time: 10 ±0.5 seconds</p> <p>Recovery time: 24 ±2 hours</p> | <p>Dissolution of the end face plating shall not exceed 25% of the length of the edge concerned</p> <hr/> <p><math>\Delta C/C</math></p> <p>Class I:</p> <p>NP0: within ±0.5% or 0.5 pF, whichever is greater</p> <p>Class2:</p> <p>X7R: ±10%</p> <hr/> <p>D.F. within initial specified value</p> <p><math>R_{ins}</math> within initial specified value</p> |
| Solderability                | 4.10                    | <p>Preheated the temperature of 80 °C to 140 °C and maintained for 30 seconds to 60 seconds.</p> <p>1. Temperature: 235±5°C<br/>/ Dipping time: 2 ±0.5 s</p> <p>2. Temperature: 245±5°C<br/>/ Dipping time: 3 ±0.5 s (lead free)</p> <p>Depth of immersion: 10mm</p>                                                                                                                  | <p>The solder should cover over 95% of the critical area of each termination</p>                                                                                                                                                                                                                                                                              |
| Rapid Change of Temperature  | IEC 60384-21/22<br>4.11 | <p>Preconditioning;<br/>150 +0/-10 °C for 1 hour, then keep for 24 ±1 hours at room temperature</p> <p>5 cycles with following detail:<br/>30 minutes at lower category temperature<br/>30 minutes at upper category temperature</p> <p>Recovery time 24 ±2 hours</p>                                                                                                                 | <p>No visual damage</p> <hr/> <p><math>\Delta C/C</math></p> <p>Class I:</p> <p>NP0: within ±1% or 1 pF, whichever is greater</p> <p>Class2:</p> <p>X7R: ±15%</p> <hr/> <p>D.F. meet initial specified value</p> <p><math>R_{ins}</math> meet initial specified value</p>                                                                                     |



| TEST          | TEST METHOD     | PROCEDURE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | REQUIREMENTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|--------|----------|----------|----------|----------|----------|----------|----------|----------|-------|----------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Damp Heat     | 4.13            | <div>3. Preconditioning, class 2 only:<br/>150 +0/-10 °C /1 hour, then keep for<br/>24 ±1 hour at room temp</div> <div>4. Initial measure:<br/>Spec: refer initial spec C, D, IR</div> <div>5. Damp heat test:<br/>500 ±12 hours at 40 ±2 °C;<br/>90 to 95% R.H.</div> <div>6. Recovery:<br/>Class 1: 6 to 24 hours<br/>Class 2: 24 ±2 hours</div> <div>7. Final measure: C, D, IR</div> <div>P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be precondition according to "IEC 60384 4.1" and then the requirement shall be met.</div>                                                                                                                                                                                                                                                                                                                                                                                                      | <div>No visual damage after recovery</div> <div>ΔC/C</div> <div>Class 1:<br/>NP0: within ±2% or 1 pF, whichever is greater</div> <div>Class2:<br/>X7R: ±15%</div> <div>D.F.</div> <div>Class 1:<br/>NP0: ≤ 2 × specified value</div> <div>Class2:<br/>X7R: ≥ 25 V: ≤ 5%</div> <div>R<sub>ins</sub></div> <div>Class 1:<br/>NP0: ≥ 2,500 MΩ or R<sub>ins</sub> × C<sub>r</sub> ≥ 25s whichever is less</div> <div>Class2:<br/>X7R: ≥ 500 MΩ or R<sub>ins</sub> × C<sub>r</sub> ≥ 25s whichever is less</div> |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Endurance     | IEC 60384-21/22 | <div>4.14</div> <div>1. Preconditioning, class 2 only:<br/>150 +0/-10 °C /1 hour, then keep for<br/>24 ±1 hour at room temp</div> <div>2. Initial measure:<br/>Spec: refer initial spec C, D, IR</div> <div>3. Endurance test:<br/>Temperature: NP0/X7R: 125 °C<br/>Specified stress voltage applied for 1,000 hours:</div> <div>4. High voltage series follows with below stress condition:</div> <table><tr><th>Voltage</th><th>NPO</th><th>X7R</th></tr><tr><td>≤ 100V</td><td>2.0 × Ur</td><td>2.0 × Ur</td></tr><tr><td>200/250V</td><td>1.5 × Ur</td><td>1.5 × Ur</td></tr><tr><td>500/630V</td><td>1.3 × Ur</td><td>1.2 × Ur</td></tr><tr><td>≥ 1KV</td><td>1.2 × Ur</td><td>1.1 × Ur</td></tr></table> <div>5. Recovery time: 24 ±2 hours</div> <div>6. Final measure: C, D, IR</div> <div>P.S. If the capacitance value is less than the minimum value permitted, then after the other measurements have been made the capacitor shall be precondition according to "IEC 60384 4.1" and then the requirement shall be met.</div> | Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | NPO | X7R | ≤ 100V | 2.0 × Ur | 2.0 × Ur | 200/250V | 1.5 × Ur | 1.5 × Ur | 500/630V | 1.3 × Ur | 1.2 × Ur | ≥ 1KV | 1.2 × Ur | 1.1 × Ur | <div>No visual damage</div> <div>ΔC/C</div> <div>Class 1:<br/>NP0: within ±2% or 1 pF, whichever is greater</div> <div>Class2:<br/>X7R: ±15%</div> <div>D.F.</div> <div>Class 1:<br/>NP0: ≤ 2 × specified value</div> <div>Class2:<br/>X7R: ≥ 25 V: ≤ 5%</div> <div>R<sub>ins</sub></div> <div>Class 1:<br/>NP0: ≥ 4,000 MΩ or<br/>R<sub>ins</sub> × C<sub>r</sub> ≥ 40s whichever is less</div> <div>Class2:<br/>X7R: ≥ 1,000 MΩ or<br/>R<sub>ins</sub> × C<sub>r</sub> ≥ 50s whichever is less</div> |
| Voltage       | NPO             | X7R                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ≤ 100V        | 2.0 × Ur        | 2.0 × Ur                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 200/250V      | 1.5 × Ur        | 1.5 × Ur                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 500/630V      | 1.3 × Ur        | 1.2 × Ur                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ≥ 1KV         | 1.2 × Ur        | 1.1 × Ur                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Voltage Proof | 4.6             | <div>Specified stress voltage applied for 1~5 seconds</div> <div>Ur ≤ 100 V: series applied 2.5 Ur</div> <div>100 V &lt; Ur ≤ 200 V series applied<br/>(1.5 Ur + 100)</div> <div>200 V &lt; Ur ≤ 500 V series applied<br/>(1.3 Ur + 100)</div> <div>Ur &gt; 500 V: 1.3 Ur</div> <div>Ur ≥ 1000 V: 1.2 Ur</div> <div>Charge/Discharge current is less than 50 mA</div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | No breakdown or flashover                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |     |     |        |          |          |          |          |          |          |          |          |       |          |          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**REVISION HISTORY**

| REVISION   | DATE          | CHANGE NOTIFICATION | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------|---------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Version 21 | Jul. 13, 2018 | -                   | - Add NP0/0402/120pF to 1nF/100V, NP0/0603/1.2nF to 1.5nF/100V, NP0/1206/1.8nF/630V, NP0/1210/12nF to 22nF/100V<br>- Add X7R/0805/33nF to 47nF/200 to 250V                                                                                                                                                                                                                                                     |
| Version 20 | Sep. 14, 2017 | -                   | - Dimension outlines updated                                                                                                                                                                                                                                                                                                                                                                                   |
| Version 19 | Mar 7, 2017   | -                   | - 0805 L4 spec updated                                                                                                                                                                                                                                                                                                                                                                                         |
| Version 18 | Dec 9, 2016   | -                   | - Soldering recommendation update                                                                                                                                                                                                                                                                                                                                                                              |
| Version 17 | Aug 16, 2016  | -                   | - Capacitance range & thickness update                                                                                                                                                                                                                                                                                                                                                                         |
| Version 16 | Apr. 16, 2015 | -                   | - Capacitance range & thickness                                                                                                                                                                                                                                                                                                                                                                                |
| Version 15 | Apr. 16, 2015 | -                   | - Electrical characteristics update                                                                                                                                                                                                                                                                                                                                                                            |
| Version 14 | Sep. 25, 2014 | -                   | - Electrical characteristics update                                                                                                                                                                                                                                                                                                                                                                            |
| Version 13 | Apr. 21, 2014 | -                   | - Electrical characteristics update                                                                                                                                                                                                                                                                                                                                                                            |
| Version 12 | Dec. 12, 2013 | -                   | - Electrical characteristics update                                                                                                                                                                                                                                                                                                                                                                            |
| Version 11 | Jun. 17, 2013 | -                   | - Test method and procedure updated                                                                                                                                                                                                                                                                                                                                                                            |
| Version 10 | Nov 22, 2012  | -                   | - Test method and procedure updated                                                                                                                                                                                                                                                                                                                                                                            |
| Version 9  | Feb 02, 2012  | -                   | - Test method and procedure updated                                                                                                                                                                                                                                                                                                                                                                            |
| Version 8  | Apr 22, 2011  | -                   | - NP0 0402 100V added                                                                                                                                                                                                                                                                                                                                                                                          |
| Version 7  | Mar 01, 2011  | -                   | - Dimension updated                                                                                                                                                                                                                                                                                                                                                                                            |
| Version 6  | Sep 30, 2010  | -                   | - Update the thickness of 0805 100V                                                                                                                                                                                                                                                                                                                                                                            |
| Version 5  | Sep 28, 2010  | -                   | - Product range updated<br>- Thickness classes and packing quantity table updated                                                                                                                                                                                                                                                                                                                              |
| Version 4  | Jun 17, 2010  | -                   | - Update the dimension of 0805, 1206 and 1812                                                                                                                                                                                                                                                                                                                                                                  |
| Version 3  | Mar 25, 2010  | -                   | - Product range update                                                                                                                                                                                                                                                                                                                                                                                         |
| Version 2  | Mar 15, 2010  | -                   | - Product range update                                                                                                                                                                                                                                                                                                                                                                                         |
| Version 1  | Oct 30, 2009  | -                   | - Change to dual brand datasheet that describe Mid-voltage NP0/X7R series with RoHS compliant<br>- Replace the "100V to 630V" part of pdf files: UP-NP0X7R_MV_100-to-500V_0, UY-NP0X7R_MV_100-to-500V_0, NP0_16V-to-100V_6, NP0_50-to-500V_10, X7R_16-to-500V_9 and X7R_16V-to-100V_9<br>- Define global part number<br>- Description of "Halogen Free compliant" added<br>- Test method and procedure updated |
| Version 0  | Sep 08, 2005  | -                   | - New                                                                                                                                                                                                                                                                                                                                                                                                          |